CASE STUDY

CITY WHARF

Anderston Quay, Glasgow

CLIENT
Dandara

PROJECT
New Build, Student Accommodation (PBSA)

PACKAGE
Roofworx - Hot melt inverted roof, green roof & roof finishes

COMPLETED INVERTED ROOF

- Bristol based - Nationwide Coverage
- Full envelope contractor
- Roofs built to last. Guaranteed.

PROJECT OVERVIEW

A 492-bed student accommodation block on the banks of the Clyde

City Wharf is a new development by Dandara at Anderston Quay, Glasgow. Block A, the first of two phases, is an 8-storey purpose built student accommodation building with 492 beds and resident facilities.

Roofworx (TWG) was appointed by Dandara for the roof finishes package to the Level 08 roof - waterproofing, insulation, upstands, roof access and the finished roof of sedum, paving and pebble ballast.

The roof was handed over zone by zone, and the package was delivered 6 weeks ahead of programme.

KEY FACTS

CLIENT
Dandara

LOCATION
City Wharf, Anderston Quay, Glasgow

PROJECT TYPE
New Build, PBSA - Block A, 8 storeys, 492 beds

ROOFWORX PACKAGE
Level 08 roof: hot melt inverted roof, upstands, roof access hatches, sedum green roof, paving & pebble ballast

PROGRAMME
Completed 6 weeks ahead of programme

MANUFACTURER / SYSTEM
Axter Wilotekt-Plus hot melt · Axter Hyranger upstands

1,915m²	492	4	6 wks
HOT MELT INVERTED ROOF	STUDENT BEDS BELOW	ROOF ZONES HANDED OVER	AHEAD OF PROGRAMME

Block A under construction
City Wharf, Anderston Quay, Glasgow

THE CHALLENGES

A large, heavily serviced roof eight storeys up

01

A heavily penetrated roof

The roof carried 94 soil vent pipes, 53 davit sockets, 41 abseil posts and 24 fall protection posts, plus rainwater outlets, overflows, a smoke ventilator and access hatches - every one needing a watertight weathering detail.

02

Tall parapets and shafts

Parapet upstands ranged from 585mm up to 2.2m high, alongside lift shaft and smoke shaft abutments, all needing insulated, waterproofed upstands tied into the main roof.

03

Zoned handover at height

The roof was split into four zones, each inspected and electronically integrity tested before finishes went down - all on a live city-centre site eight storeys up.

PRODUCT SOLUTIONS

Axter hot melt inverted roof with green roof finishes

Roofworx installed an Axter Wilotekt-Plus hot melt inverted roof across 1,915m² of the concrete deck. Hot melt is quick to install and bonds straight to the deck, so each zone was watertight early and other trades could follow on. XPS insulation and a water flow reducing layer were laid over the top to a U-value of 0.15 W/m²K.

Upstands were waterproofed with the Axter Hyranger system, and the roof was finished with a sedum green roof, a paved maintenance walkway on adjustable pedestals and washed pebble ballast.

SYSTEMS INSTALLED

- **Axter Wilotekt-Plus hot melt**
  Structural waterproofing bonded to the concrete deck - 1,915m² main roof plus internal gutters
- **XPS inverted insulation**
  200mm insulation with water flow reducing layer - U-value 0.15 W/m²K
- **Axter Hyranger upstands**
  Insulated waterproofing to parapets, lift shaft and smoke shaft
- **Roof finishes & access**
  247m² sedum, 325m² paved walkway, 1,310m² pebble ballast; Surespan access hatches and caged ladders

Waterproofed upstands

Insulated upstands to parapets and plant

Inverted insulation

Laid over the bonded waterproofing

PROJECT GALLERY

From bare deck to finished roof

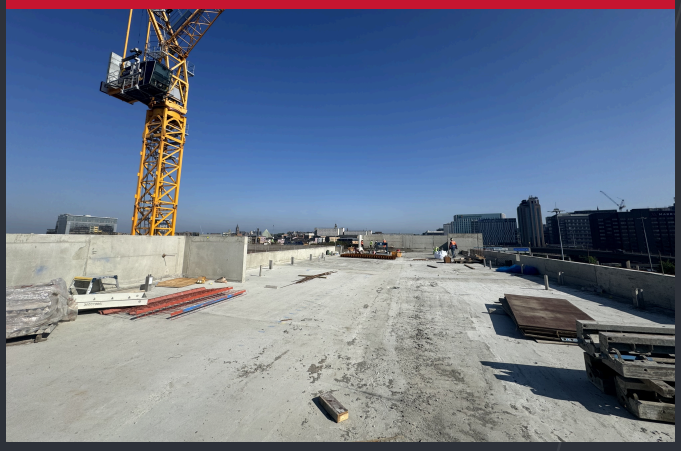

Before works
Level 08 concrete deck

Waterproofing in progress
Hot melt and upstands

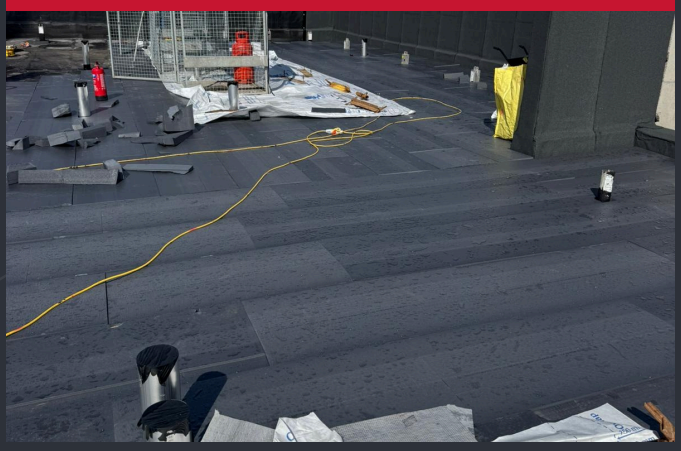

Finishes going down
Laid over the completed waterproofing

Sedum and paving
Paved maintenance walkway

Pebble ballast
Washed pebbles with paved walkway

Green roof
Sedum with pebble margins

THE RESULT

A finished, tested roof - 6 weeks ahead of programme

Roofworx (TWG) delivered the full roof finishes package at City Wharf 6 weeks ahead of programme. All four zones passed Axter's final quality assurance inspections in September 2025 with no non-compliant items, and the waterproofing was electronically integrity tested in phases by an independent testing company.

From waterproofing and upstands to roof access, green roof and paving, Dandara had one contractor for the whole roof.

PROJECT AT A GLANCE

01 THE CHALLENGE

A 1,915m² roof eight storeys up, with over 200 penetrations and parapets up to 2.2m high.

02 OUR SOLUTION

Axter Wilotekt-Plus hot melt inverted roof with Hyranger upstands, finished in sedum, paving and pebble ballast.

03 THE RESULT

Four zones signed off by Axter with no non-compliant items - delivered 6 weeks ahead of programme.

AHEAD OF PROGRAMME

Roof finishes package delivered 6 weeks ahead of programme for Dandara

WHY ROOFWORX

- **Bristol based - Nationwide Coverage**
- **Full envelope contractor**
- **Roofs built to last. Guaranteed.**

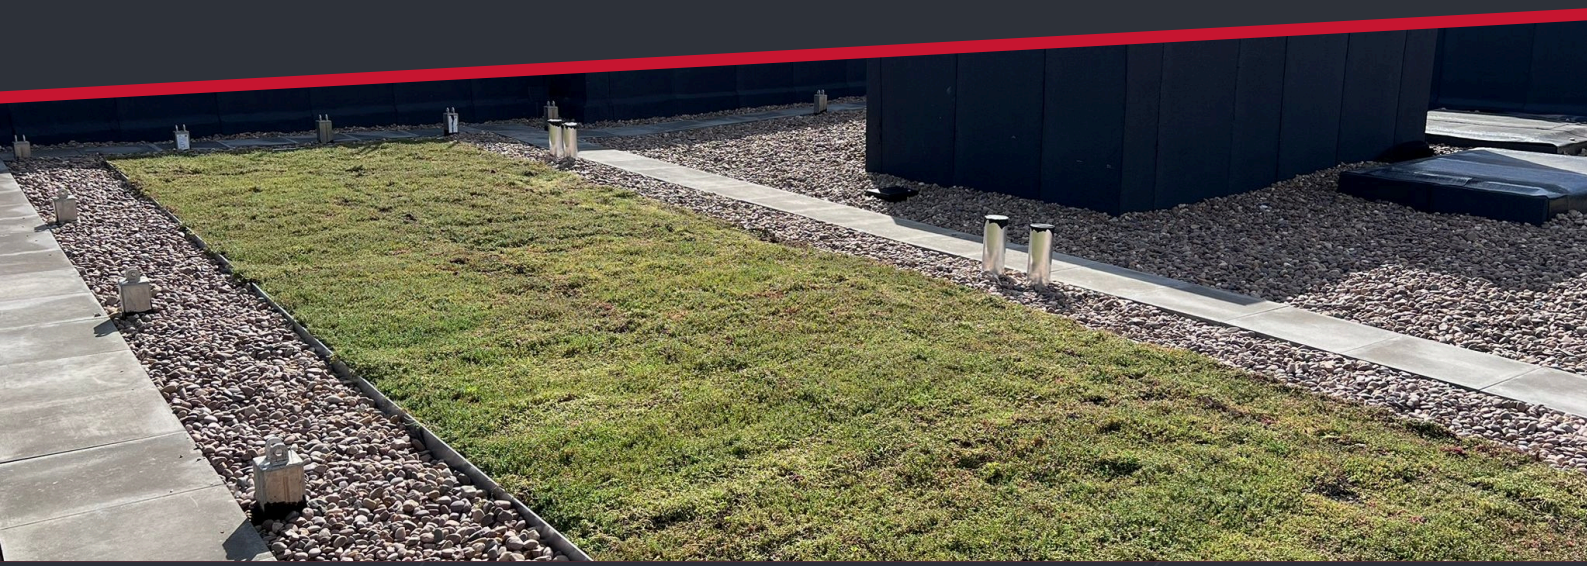

Completed roof

Sedum, pebbles and paving, Level 08

ROOFWORX
ROOFING & CLADDING

Bristol based - Nationwide Coverage

- Full envelope contractor
- Roofs built to last. Guaranteed.

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group