

CASE STUDY


FRIARY QUAY

Temple Quay, Bristol

MAIN CONTRACTOR
Beard

PROJECT
Office Redevelopment

PACKAGE
Hot-melt blue roof & torch-on terrace waterproofing

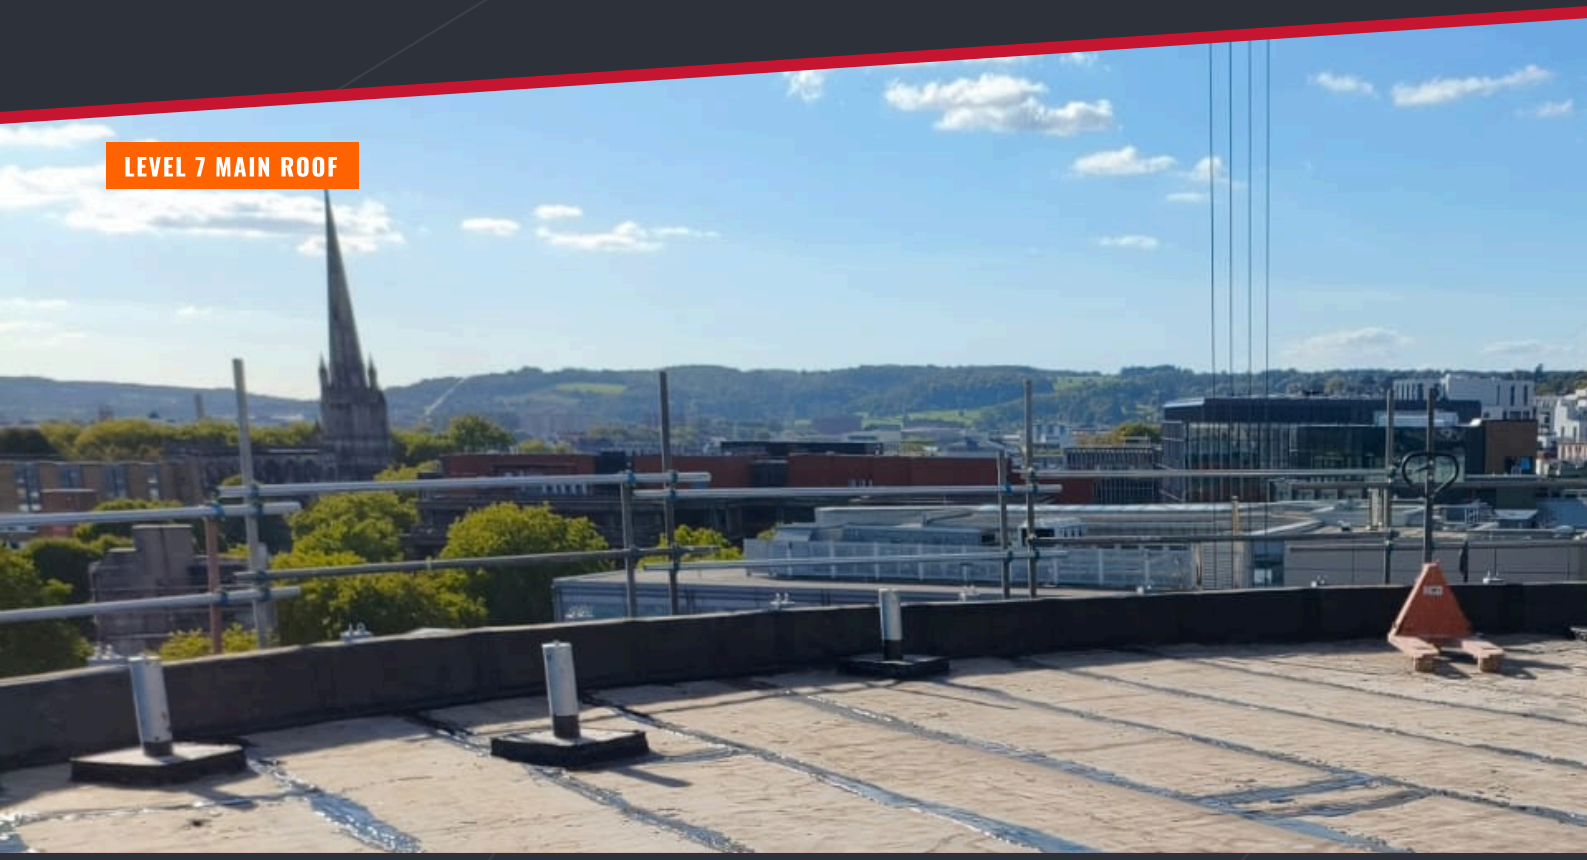

LEVEL 7 MAIN ROOF

- **Bristol based - Nationwide Coverage**
- **Full envelope contractor**
- **Roofs built to last. Guaranteed.**

PROJECT OVERVIEW

Two waterproofing systems for an office redevelopment at Temple Quay

Roofworx was appointed by main contractor Beard to deliver the roof waterproofing at Friary Quay, an office building redevelopment at Temple Quay in central Bristol.

The package covered the Level 7 main roof, built as an inverted blue roof using the Alumasc Hydrotech hot-melt system with pebble and paving finishes, plus the Level 6 terrace and Level 7 perimeter edge in Derbigum built-up felt over PIR insulation.

Works started on site in August 2025 and the roofing was completed in May 2026, with Alumasc technical visits throughout and every roof area electronically tested by an independent company.

KEY FACTS

MAIN CONTRACTOR
Beard

LOCATION
Temple Quay, Bristol BS1 6EA

PROJECT TYPE
Office redevelopment

ROOFWORX PACKAGE
Blue roof & terrace waterproofing

PROGRAMME
August 2025 - May 2026

MANUFACTURER / SYSTEM
Alumasc Hydrotech & Derbigum

2	2	500m²	30 yr
WATERPROOFING SYSTEMS	ROOF LEVELS (L6 & L7)	ROOF AREA	SYSTEM WARRANTY



Hot-melt application
Level 7 main roof

THE CHALLENGES

Waterproofing a city-centre redevelopment around the building envelope works

01

Sequencing with the windows

Derbigum upstands and the AVCL to internal upstands had to be installed before the window frames went in, so the roofing was programmed around the envelope trades.

02

Two systems, two levels

The Level 7 main roof needed the Alumasc Hydrotech hot-melt system, while the Level 6 terrace and perimeter edge needed Derbigum built-up felt, each with its own build-up, specification and warranty, delivered on the same programme.

03

Narrow areas on a Mansafe system

Parts of the roof were narrow perimeter areas where the team worked attached to the Mansafe fall-arrest system. Work was planned in the RAMS so each area was set out, harnessed and completed in sequence, keeping the team safe without slowing progress.

PRODUCT SOLUTIONS

Installed by Alumasc registered contractor Roofworx

Roofworx installed both waterproofing systems as an Alumasc registered contractor, with Alumasc-carded operatives working to the specification and an inspection and test plan.

Alumasc's site technician visited regularly from August 2025 to June 2026 to inspect the works, and every roof area was electronically tested by an independent company ahead of the warranty applications.

SYSTEMS INSTALLED

- **Alumasc Hydrotech Monomelt 6125**
  Hot-melt waterproofing to the Level 7 main roof
- **Hydrogard 20, 180mm XPS & LO-k layer**
  Protection, inverted insulation and filter layer
- **Derbigum Hi-Ten + Mineral Cap Sheet**
  Level 6 terrace & Level 7 perimeter edge
- **Euroroof AVCL & 130mm BGT PIR**
  Vapour control and insulation under the Derbigum



Narrow perimeter on Mansafe
Level 7, Friary Quay



Detailing at a Mansafe post
Derbigum cap sheet

PROJECT GALLERY

Friary Quay, Temple Quay, Bristol



Torching cap sheet
Derbigum perimeter



Finished cap sheet
Level 7 perimeter



Electronic integrity test
Every area independently tested



XPS insulation
Inverted build-up, Level 7



Pebble ballast
Blue roof with paving edge



Porcelain paving
Finished terrace

THE RESULT

Roofing complete and handed over with a full O&M manual

The roofing works were completed in May 2026, with the final Alumasc inspection recording the works 100% complete and warranty applications submitted for both systems.

Friary Quay shows Roofworx delivering multiple manufacturer systems on one city-centre redevelopment, co-ordinated around other trades and backed by manufacturer inspection and independent electronic testing of every area.

PROJECT AT A GLANCE

01 THE CHALLENGE

Waterproofing two roof levels of a city-centre redevelopment around the window installation, including narrow areas worked on a Mansafe system.

02 OUR SOLUTION

Alumasc Hydrotech hot-melt blue roof to Level 7, Derbigum built-up felt to the Level 6 terrace and perimeter.

03 THE RESULT

Completed May 2026, with every area independently electronically tested and a 30-year system warranty applied for.

GUARANTEE

30-year Alumasc system warranty

WHY ROOFWORX

- **Bristol based - Nationwide Coverage**
- **Full envelope contractor**
- **Roofs built to last. Guaranteed.**



Blue roof attenuation layer
Friary Quay, Temple Quay, Bristol

ROOFWORX
ROOFING & CLADDING

Bristol based - Nationwide Coverage

- Full envelope contractor
- Roofs built to last. Guaranteed.

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group