

CASE STUDY

HAWTHORNE HOUSE

Stratford, London

MAIN CONTRACTOR
RG Group

PROJECT
Student accommodation tower (Unite Group)

PACKAGE
Soprema waterproofing, cappings, cladding, terraces & green roofs



LEVEL 37 ROOF

- Bristol based - Nationwide Coverage
- Full envelope contractor
- Roofs built to last. Guaranteed.

PROJECT OVERVIEW

Roof waterproofing, cappings, cladding and green roofs on a high-rise in Stratford

Roofworx was appointed by main contractor RG Group to deliver the roofing package at Hawthorne House, 2 Farthingale Walk, Stratford, a high-rise building for Unite Group.

The package covered Soprema waterproofing across the Level 6 terrace and plant balcony, Level 7, Level 36 and the Level 37 roof, including the felt waterproofing beneath the PV panel areas, using a mix of Soprema Duoflex hot-melt inverted roofs with XPS insulation and Soprema Sopralene warm roofs. Alongside the waterproofing, Roofworx delivered parapet cappings and fascia panels, composite decking, planters, glass balustrade, paving, free-standing edge protection and handrail, and green roofs to Level 7, Level 36 and the visitor centre, plus the soffit cladding and entrance cladding.

The subcontract was signed in June 2025, with Soprema site inspections from June 2025 to May 2026, every roof area independently electronically tested, and roof practical completion recorded on 26 June 2026.

KEY FACTS

MAIN CONTRACTOR
RG Group

CLIENT
Unite Group PLC

LOCATION
Stratford, London E15 1AN

ROOFWORX PACKAGE
Waterproofing, cappings, cladding, terraces & green roofs

PROGRAMME
June 2025 - June 2026

MANUFACTURER / SYSTEM
Soprema Duoflex & Sopralene

1,183m²	2	5	25 yr
ROOF WATERPROOFING	SOPREMA ROOF SYSTEMS	SOPREMA WARRANTY AREAS	SYSTEM WARRANTY



Parapet cappings
Finished cappings and pebble ballast

THE CHALLENGES

Roofing at height on a constrained city site

01

Just-in-time logistics

The site was extremely constrained with no long-term storage, so all deliveries were pre-booked through the main contractor's MyHub system and brought in just in time.

02

Green roof after the crane had gone

The Level 36 green roof was completed after the site tower crane had been dismantled, so all of the green roof materials had to be brought up in small 25kg bags using the lift.

03

Multiple finishes, one package

Each level had its own finish, from decking, planters and balustrade on Level 6 to paving on the plant balcony and Level 36, and green roofs on Levels 7 and 36 and the visitor centre.

PRODUCT SOLUTIONS


Installed by Soprema approved contractor Roofworx

Roofworx installed the Soprema systems as an approved contractor: Duoflex hot-melt inverted roofs with Sopra XPS insulation, and Sopralene warm roofs built up with Sopravap vapour control layer, Sopratherm insulation and a Sopralene cap sheet. Soprema technical inspections were recorded on site from June 2025 to May 2026, and every roof area was independently electronically tested ahead of the warranty applications.

Parapets on Levels 6, 7 and 36 were finished with Stormguard aluminium cappings and fascia panels. Roofworx also installed the soffit cladding and the entrance cladding.

SYSTEMS INSTALLED

- **Soprema Duoflex hot-melt**
  Inverted roofs with Sopra XPS insulation
- **Soprema Sopralene warm roof**
  Sopravap VCL, Sopratherm & Sopralene cap sheet
- **Stormguard aluminium cappings**
  Parapet cappings and fascia panels
- **Green roofs, decking & paving**
  Levels 6, 7, 36 & visitor centre

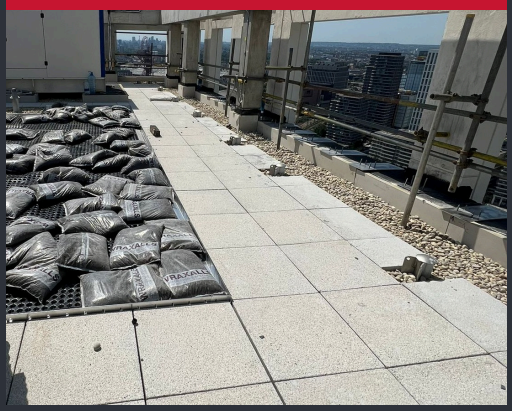

Green roof going in

25kg bags brought up by lift, Level 36




Capping detail

Cut around stone pier

PROJECT GALLERY


Hawthorne House, Stratford, London

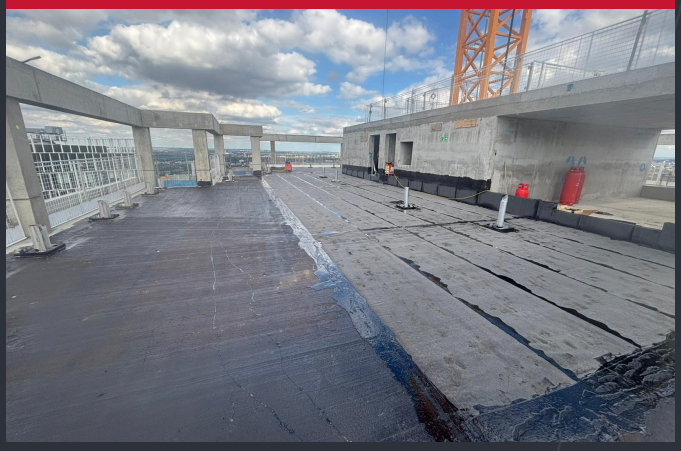

Level 36
Hot-melt waterproofing being applied




Capping brackets
Set out along the parapet

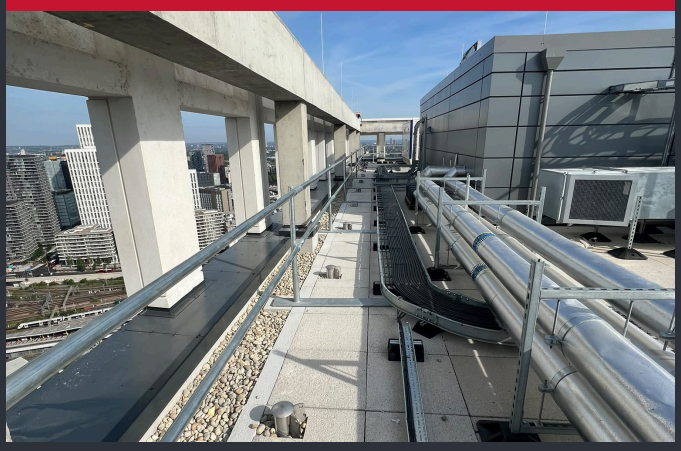

Level 36 Plantroom
Cappings, paving, handrail & cladding



Level 6 Terrace
Decking, planters, cappings & balustrades

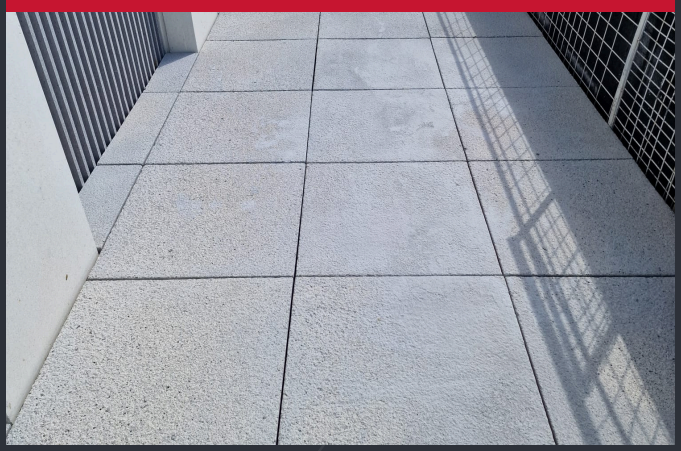

Level 7 Terrace
Porcelain paving



Green roof
Level 7

THE RESULT

Roofing complete and warranty applications submitted

Roof practical completion was recorded on 26 June 2026. Every area was independently electronically tested, and Soprema warranty applications for all five roof areas were submitted in September 2026.

Hawthorne House shows Roofworx delivering waterproofing, cappings, cladding and terrace finishes as one package on a high-rise London scheme.

PROJECT AT A GLANCE

01 THE CHALLENGE

Roofing several levels of a high-rise on a constrained Stratford site, including the Level 36 green roof after the tower crane had gone.

02 OUR SOLUTION

Soprema Duoflex inverted and Sopralene warm roofs, with Stormguard cappings, decking, balustrade, paving, edge protection and green roofs.

03 THE RESULT


Practical completion June 2026, every area independently electronically tested and a 25-year Soprema warranty applied for.

GUARANTEE

25-year Soprema system warranty

WHY ROOFWORX

- **Bristol based - Nationwide Coverage**
- **Full envelope contractor**
- **Roofs built to last. Guaranteed.**

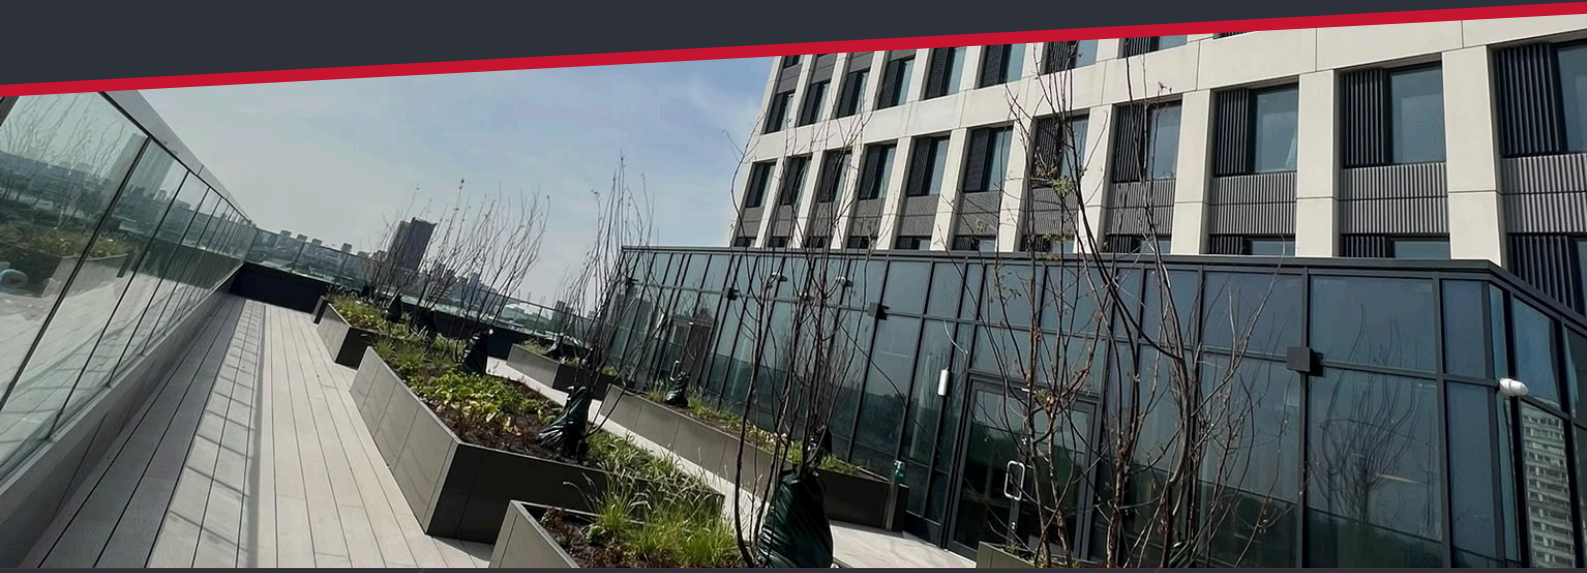

Level 6 Terrace
Decking, planters, glass balustrades & cappings

ROOFWORX
ROOFING & CLADDING

Bristol based - Nationwide Coverage

- Full envelope contractor
- Roofs built to last. Guaranteed.

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group