

CASE STUDY

LOWER LEASE

Saunton, North Devon

MAIN CONTRACTOR
Stonewood Builders

PROJECT
Residential Refurb

PACKAGE
Joinery – porch installation

BESPOKE DOUGLAS FIR PORCH



- Bristol based - Nationwide Coverage
- Carpentry & joinery
- Part of The Worx Group

PROJECT OVERVIEW

A new timber entrance porch in North Devon

Lower Lease was a residential house refurbishment by Stonewood Builders at Saunton, North Devon. Woodworx were appointed to supply and install the new timber entrance porch.

The porch comprised seven bespoke Douglas Fir trusses, assembled and dry-fitted off site before installation. Woodworx also installed the wall coverings and sheathing, a single-ply roof to the porch and two louvres to either side of the entrance door. Variations added triangular glazed panels rebated into the trusses and a cement-board soffit.

Aluminium PPC panels and flashings were procured through our sister company Roofworx, so the structure, cladding and weathering came from one group.

KEY FACTS

MAIN CONTRACTOR
Stonewood Builders

CLIENT
Private client

LOCATION
Saunton, North Devon


PROJECT TYPE
Residential Refurb

PACKAGE
Joinery – porch installation

PROGRAMME
Jul 2025 – Mar 2026

VALUE
£49,353 order value

7	2nr	18x94mm
BESPOKE DOUGLAS FIR TRUSSES	PPC LOUVRES	CEDAR BOARDS

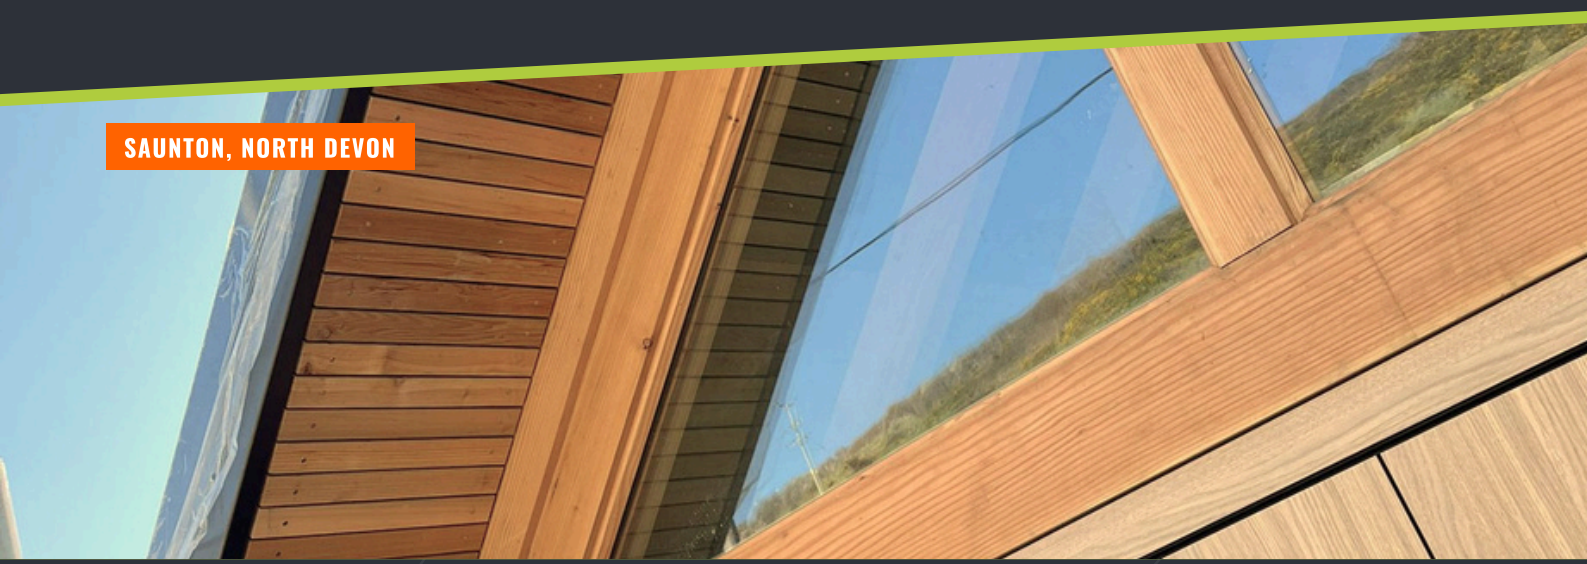

Completed porch
Lower Lease, Saunton

THE CHALLENGES

Out-of-tolerance steel and a remote coastal site

01
Steelwork by others

The porch had to be built around steelwork installed by others, which was out of tolerance and in places did not match the beam sizes shown on the drawings, so the timber structure had to be adapted on site.

02
Remote location

The remote coastal location meant the team stayed locally during installation visits.

03
Weathertight

A temporary water seal was provided to the glazed screen to keep the building weathertight.


PRODUCT SOLUTIONS

Douglas Fir, cedar and single-ply


The structure was assembled and dry-fitted off site, with metalwork procured via Roofworx.

SYSTEMS INSTALLED

- **Structure**
  Seven bespoke Douglas Fir trusses, assembled and dry-fitted off site
- **Sheathing & membrane**
  12mm Class 3 OSB sheathing both sides; Siga Majvest 700 SOB black breather membrane
- **Cladding**
  18x94mm cedar boards on 50x25 / 50x38 treated softwood battens stained black; A4 stainless steel fixings
- **Roof & louvres**
  Renolit Alkorplan black single-ply with cedar board covering; 2nr Ducogrille Solid 30Z (Bridge Louvre Company), PPC to match the windows
- **Glazing, soffit & metalwork**
  Triangular glazed panels rebated into the trusses; cement-board soffit; aluminium PPC panels, flashings and butt straps (Finish Facades) via Roofworx

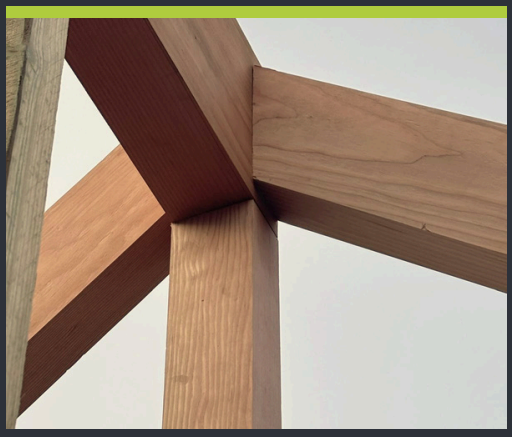

Douglas Fir trusses
Truss junction

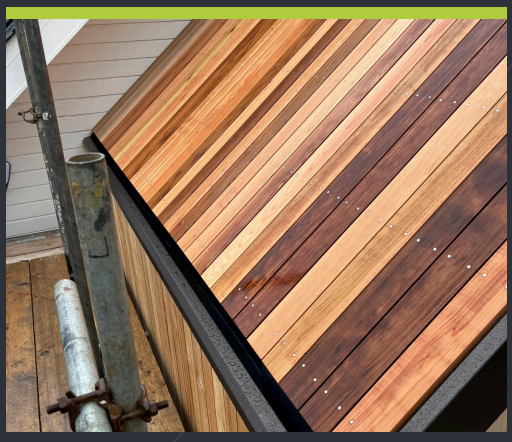


Cedar cladding
Boards on black-stained battens

TWG
THE WORX GROUP

WOODWORX
CARPENTRY & JOINERY

PROJECT GALLERY


The porch at Lower Lease

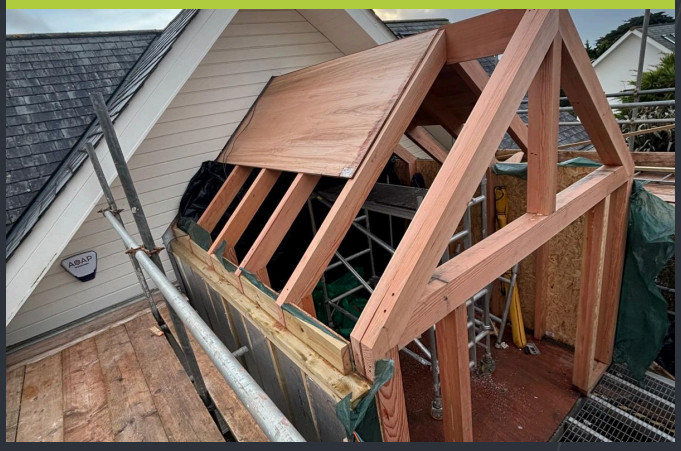

Trusses installed
Frame in place



Truss frame
Douglas Fir structure

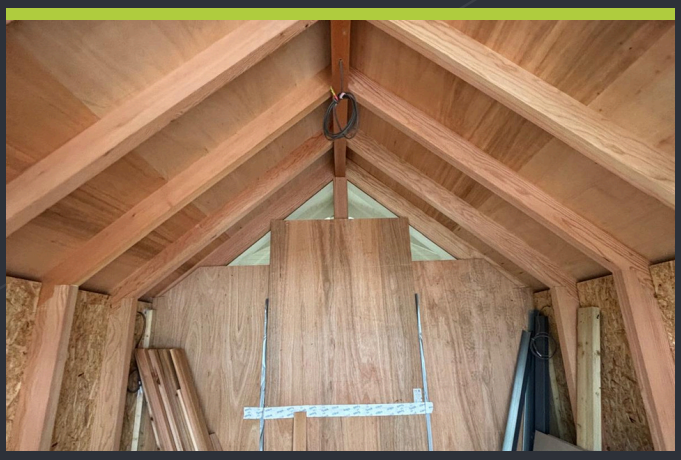


Porch interior
Exposed trusses



Cladding
Cedar boards



Glazed gable
Panels rebated into the trusses

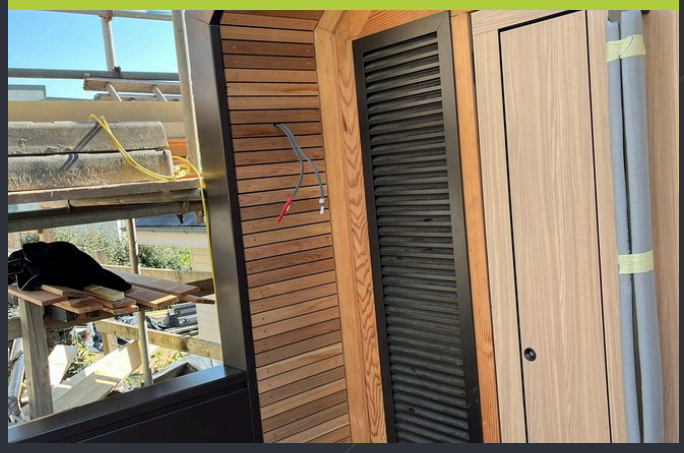

Entrance
Louvre beside the door

THE RESULT

Structure, cladding and weathering from one group

> Woodworx supplied and installed a bespoke Douglas Fir porch with cedar cladding, a black single-ply roof, PPC louvres and glazed panels, with aluminium panels and flashings procured through Roofworx.

PROJECT AT A GLANCE

01 THE CHALLENGE

Out-of-tolerance steelwork by others on a remote coastal site.

02 OUR SOLUTION

Off-site dry-fitted Douglas Fir trusses, adapted on site.

03 THE RESULT

A new timber entrance porch with cedar cladding and PPC louvres.

WHY THE WORX GROUP

- **Bristol based - Nationwide Coverage**
- **Bespoke carpentry, assembled off site**
- **Structure, cladding and weathering from one group**



Completed porch
Lower Lease, Saunton

WOODWORX

CARPENTRY & JOINERY

Bristol based - Nationwide Coverage

- Carpentry & joinery
- Part of The Worx Group

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group