



CASE STUDY

SAP 4

Stoke Gifford, Bristol

MAIN CONTRACTOR
Bowmer & Kirkland

PROJECT
New Build, Student Accommodation (PBSA)

PACKAGE
Roofworx - Hot melt inverted roofs, sedum green roof & roof finishes



- Bristol based - Nationwide Coverage
- Full envelope contractor
- Roofs built to last. Guaranteed.

PROJECT OVERVIEW

Hot melt roofs across six levels of a 330-bed student scheme

SAP 4 is a 330-bed new build student accommodation block at Stoke Gifford, Bristol, built by Bowmer & Kirkland. The building is concrete framed with a façade of brick slips, curtain walling and cladding panels.

Roofworx (TWG) delivered the roofing package across roof levels 1, 5, 6, 7, 8 and 9, including the Level 6 plant room roof - structural waterproofing, inverted insulation, upstands and weathering of penetrations, plus a single ply roof built on galvanised steel framing and a render finish to the plant room walls. Level 1 was finished with a sedum green roof, and Levels 5 to 9 with pebble ballast and paved maintenance walkways.

The roofs were installed and handed over level by level, and the package was delivered on programme, completing in October 2025.

KEY FACTS

MAIN CONTRACTOR
Bowmer & Kirkland

LOCATION
Fox Den Road, Stoke Gifford, Bristol

PROJECT TYPE
New Build, PBSA - 330 beds

ROOFWORX PACKAGE
Roof levels 1, 5, 6, 7, 8 & 9: hot melt inverted roofs, upstands, Level 1 sedum green roof, paving & pebble ballast

PROGRAMME
Delivered on programme - completed October 2025

MANUFACTURER / SYSTEM
Soprema Duoflex single pour hot melt · Sopratherm XPS · 30-year Soprema guarantee

c.1,650m²	6	330	30 yr
HOT MELT WATERPROOFING	ROOF LEVELS	STUDENT BEDS BELOW	SOPREMA GUARANTEE



SAP 4 roofs
Stoke Gifford, Bristol

THE CHALLENGES

Six roof levels, phased around a live build

01
Multiple roof levels

The package covered six separate roof levels plus a plant room roof, each started and handed over in sequence with the frame and envelope trades.

02
A demanding thermal target

The roof build-up had to achieve a U-value of 0.1 W/m²K or better, alongside the scheme's fire, air seal and acoustic requirements.

03
Penetrations and upstands

Every soil vent pipe, flue, lift overrun, cable duct and outlet needed a weathering detail, with insulated upstands to parapets, plant enclosures and abutments.

PRODUCT SOLUTIONS


Soprema approved installer - single pour hot melt system

Roofworx installed a Soprema Duoflex single pour hot melt inverted roof across c.1,650m² of concrete deck. Hot melt bonds straight to the deck, so each level was watertight early and following trades could get on. Roofworx also built a single ply roof on galvanised steel framing and applied render to the plant room walls.

Soprema's technical team inspected the works throughout installation, and each level was electronically integrity tested by an independent testing company before finishes went down.

SYSTEMS INSTALLED

- **Soprema Duoflex single pour hot melt**
  Structural waterproofing with SP grid reinforcement, bonded to the concrete deck
- **Sopratherm XPS insulation**
  340mm two-layer (200 + 140mm) inverted insulation with Ecran Roof water flow reducing layer
- **Insulated upstands**
  c.437 linear metres of upstands to parapets, plant enclosures and abutments (Levels 5-9)
- **Roof finishes**
  Level 1 sedum green roof; Levels 5-9 c.149m² paved maintenance walkways and c.1,170m² pebble ballast

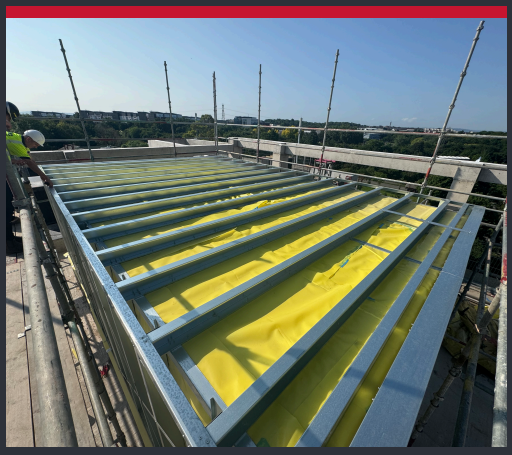


Steel framing
Base for a single ply roof



Electronic integrity testing
Membrane tested before finishes

PROJECT GALLERY

Green roof, finishes and details

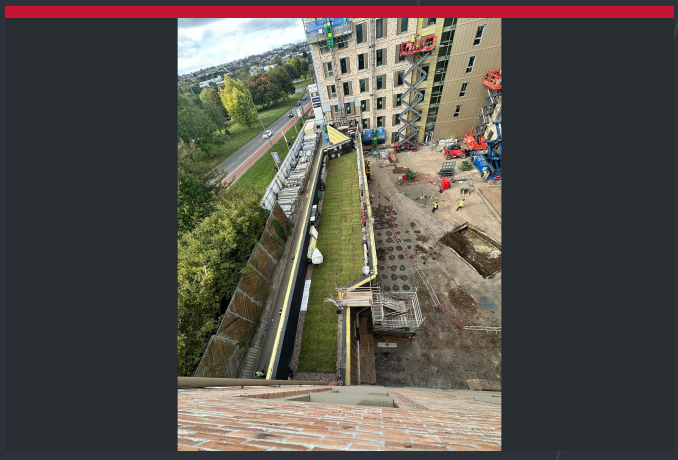

Sedum green roof
Level 1 overview



Green roof substrate
Laid between pebble borders




Plant room walls
Render finish



Render detail
Metal flashing over pebble ballast



Parapet and coping
Pebble ballast and walkway

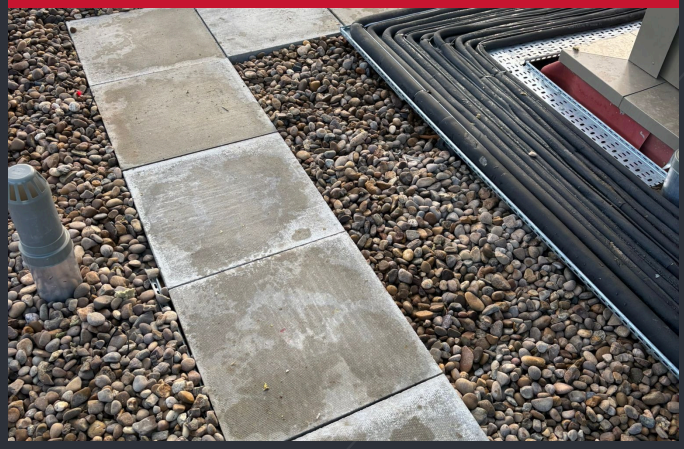

Maintenance walkways
Paving over pebble ballast

THE RESULT

Six roof levels, delivered on programme

Roofworx (TWG) delivered the SAP 4 roofing package for Bowmer & Kirkland on programme, completing in October 2025. The roofs were electronically integrity tested by Rooftest Ltd, Soprema's technical team carried out inspections throughout the works, and the roofs are covered by a 30-year Soprema guarantee.

From waterproofing and insulation to upstands, paving and ballast, Bowmer & Kirkland had one contractor for every roof on the building.

PROJECT AT A GLANCE

01 THE CHALLENGE

Six roof levels on a live student scheme, with a U-value target of 0.1 W/m²K.

02 OUR SOLUTION

Soprema Duoflex single pour hot melt inverted roofs with 340mm XPS, a Level 1 sedum roof, paving and pebble ballast.

03 THE RESULT

Electronically integrity tested, delivered on programme in October 2025 with a 30-year Soprema guarantee.

DELIVERED ON PROGRAMME

Six roof levels delivered on programme, backed by a 30-year Soprema guarantee

WHY ROOFWORX

- **Bristol based - Nationwide Coverage**
- **Full envelope contractor**
- **Roofs built to last. Guaranteed.**



Finished roof
Pebble ballast within the parapets

ROOFWORX
ROOFING & CLADDING

Bristol based - Nationwide Coverage

- Full envelope contractor
- Roofs built to last. Guaranteed.

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group