

CASE STUDY

TIMBER YARD

The Wharf, Box, Corsham

MAIN CONTRACTOR
Red Construction

DEVELOPER
Stonewood Homes

PACKAGE
Roofworx - Pitched roofs, waterproofing & podium landscaping

COMPLETED DEVELOPMENT



- Bristol based - Nationwide Coverage
- Full envelope contractor
- Roofs built to last. Guaranteed.

PROJECT OVERVIEW

20 sustainable new homes in the village of Box, Wiltshire

Old Timberyard is a collection of 20 sustainable new homes by Stonewood Homes, set in the village of Box on the edge of the By Brook. The two, three and four-bedroom homes combine traditional architectural elements with contemporary design, and are EPC A rated with air source heat pumps and, on selected plots, solar PV.

Roofworx (TWG) delivered the roofing package across the four residential blocks (A-D), working with main contractor Red Construction.

The package combined Cedral Rivendale fibre cement slate roofs to 16 of the homes with Axter hot melt waterproofing, insulation and full podium landscaping to the terraces above the garages and bike stores.

KEY FACTS

DEVELOPER
Stonewood Homes

MAIN CONTRACTOR
Red Construction


LOCATION
The Wharf, Box, Corsham SN13 8EP

PROJECT TYPE
New Build, Residential - 20 homes

ROOFWORX PACKAGE
Pitched roof coverings to 16 homes; flat roof waterproofing, insulation & podium landscaping to Blocks A-D

SYSTEMS
Cedral Rivendale slates · Axter Wilotekt-Plus hot melt

16	c.1,200m²	c.690m²	c.290m²
HOMES WITH SLATE ROOFS	PITCHED ROOF COVERINGS	HOT MELT WATERPROOFING	PORCELAIN TERRACE PAVING

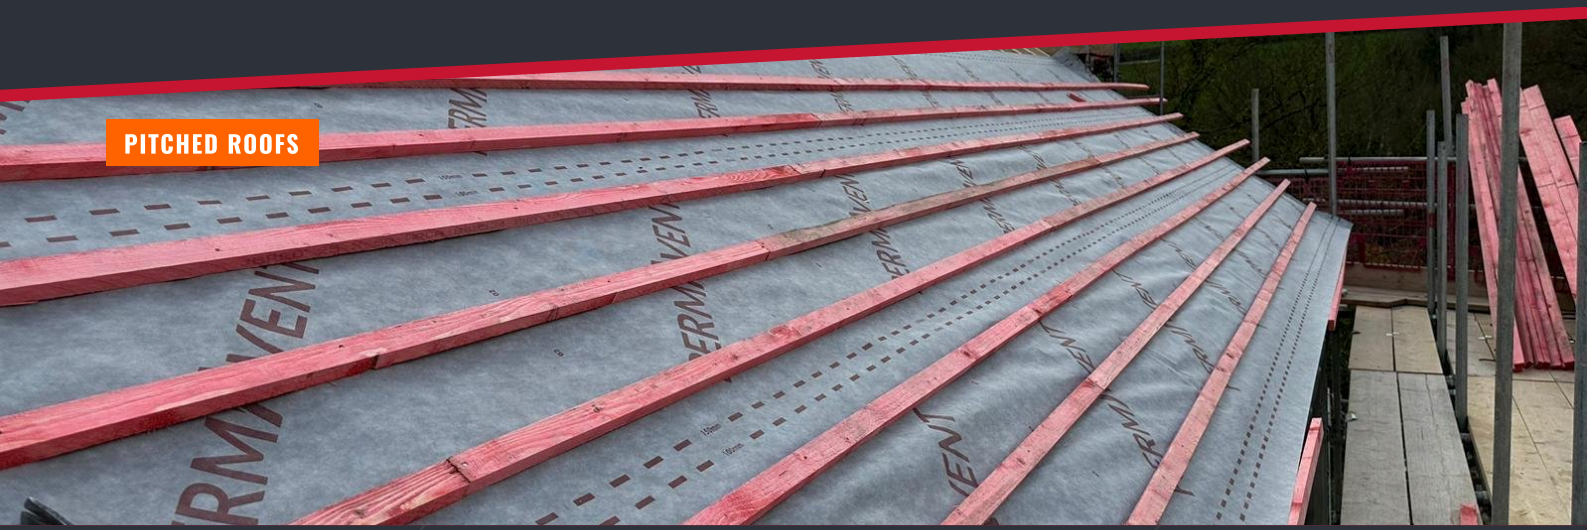

Battens and counter battens
Treated battens over breathable membrane, ready for slating

THE CHALLENGES

Zero-fall terraces and slate roofs with integrated solar PV

01

Zero-fall podium terraces

The terraces combine insulated areas over living space with uninsulated areas over the garages and bike stores. Wilotekt-Plus is a zero-fall system, so drainage was a key consideration, with rainwater outlets with extended leafguards to every block.

02

Hollow plank deck & thresholds

The hot melt was applied over a hollow plank concrete deck, where plank tolerances can affect finished levels and door thresholds. Upstands were detailed generally 150mm above finished floor level and 75mm above door thresholds.

03

Solar PV & roof details

Eight of the homes have solar PV panels set into the slate roofs, needing felt and battens beneath the panels and slates cut neatly around them once fitted - alongside dry ridge and verge systems, eaves ventilation and rafter trays.

PRODUCT SOLUTIONS

Axter-designed waterproofing & Cedral slate roofs

On the terraces Roofworx installed an Axter-designed Wilotekt-Plus hot melt system - surface conditioner, rubberised compound, reinforcement mesh and protection layer - with Arma CPV charcoal capsheet to abutments and parapets. Areas over living space were insulated as an inverted roof with Hytherm Eco XPS, designed by Axter to a U-value of 0.16 W/m²K.

The pitched roofs were covered in Cedral Rivendale fibre cement slates on breathable membrane, treated battens and counter battens.

SYSTEMS INSTALLED

- **Axter Wilotekt-Plus hot melt**
  Zero-fall structural waterproofing to the podium terraces, with Arma CPV charcoal capsheet detailing
- **Hytherm Eco XPS inverted insulation**
  Over living areas - designed by Axter to 0.16 W/m²K
- **Podium landscaping**
  Eden Limestone porcelain paving on pedestals, gravel strips, lawn and Taxus hedge planters
- **Cedral Rivendale fibre cement slates**
  Breathable membrane and counter battens, with dry ridge, dry verge and over-fascia eaves vent systems



Slates around solar PV
Cedral Rivendale slates cut to the panels



Valley detail
Slates finished neatly into the valley

PROJECT GALLERY

Slate roofs, solar PV and landscaped podium terraces



Finished slate roof
Cedral Rivendale fibre cement slates




Completed podium terrace
Porcelain paving and hedge planters



Roof ventilation
Vent tile set into the slates below the PV



Rooflight detail
Battens set out around a rooflight

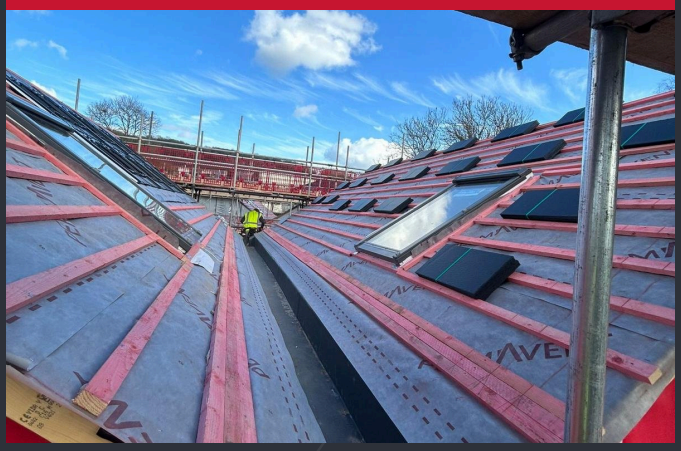

Valleys in progress
Membrane, battens and valley linings



Completed roof
Slates with integrated solar PV

THE RESULT

Slate roofs and landscaped terraces across Blocks A-D

Roofworx (TWG) delivered pitched roof coverings to 16 homes and the waterproofing, insulation and landscaping of the podium terraces across Blocks A-D at Old Timberyard.

Roofs were inspected plot by plot with the site team, with the Block A main roofs signed off in April 2024 - a full roofing and terrace package from one specialist contractor.

PROJECT AT A GLANCE

01 THE CHALLENGE

Zero-fall podium terraces over a hollow plank deck, and 16 slate roofs with integrated solar PV on eight homes.

02 OUR SOLUTION

Axter Wilotekt-Plus hot melt with inverted XPS insulation and full podium landscaping; Cedral Rivendale slates with dry-fix details.

03 THE RESULT

Finished terraces with paving, lawn and hedge planters, and neat slate roofs across all four blocks.

SUSTAINABLE DEVELOPMENT

20 EPC A-rated homes by Stonewood Homes, with air source heat pumps and solar PV on selected plots

WHY ROOFWORX

- **Bristol based - Nationwide Coverage**
- **Full envelope contractor**
- **Roofs built to last. Guaranteed.**



Completed homes
Old Timberyard, The Wharf, Box

ROOFWORX
ROOFING & CLADDING

Bristol based - Nationwide Coverage

- Full envelope contractor
- Roofs built to last. Guaranteed.

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group