

CASE STUDY

OLD SNEED PARK


Clifton, Bristol

MAIN CONTRACTOR
Stonewood Builders

PROJECT
Residential Refurb

PACKAGE
New roof, vertical cladding & external feature metalwork

PETERSEN CLAY TILES TO ROOF AND WALLS

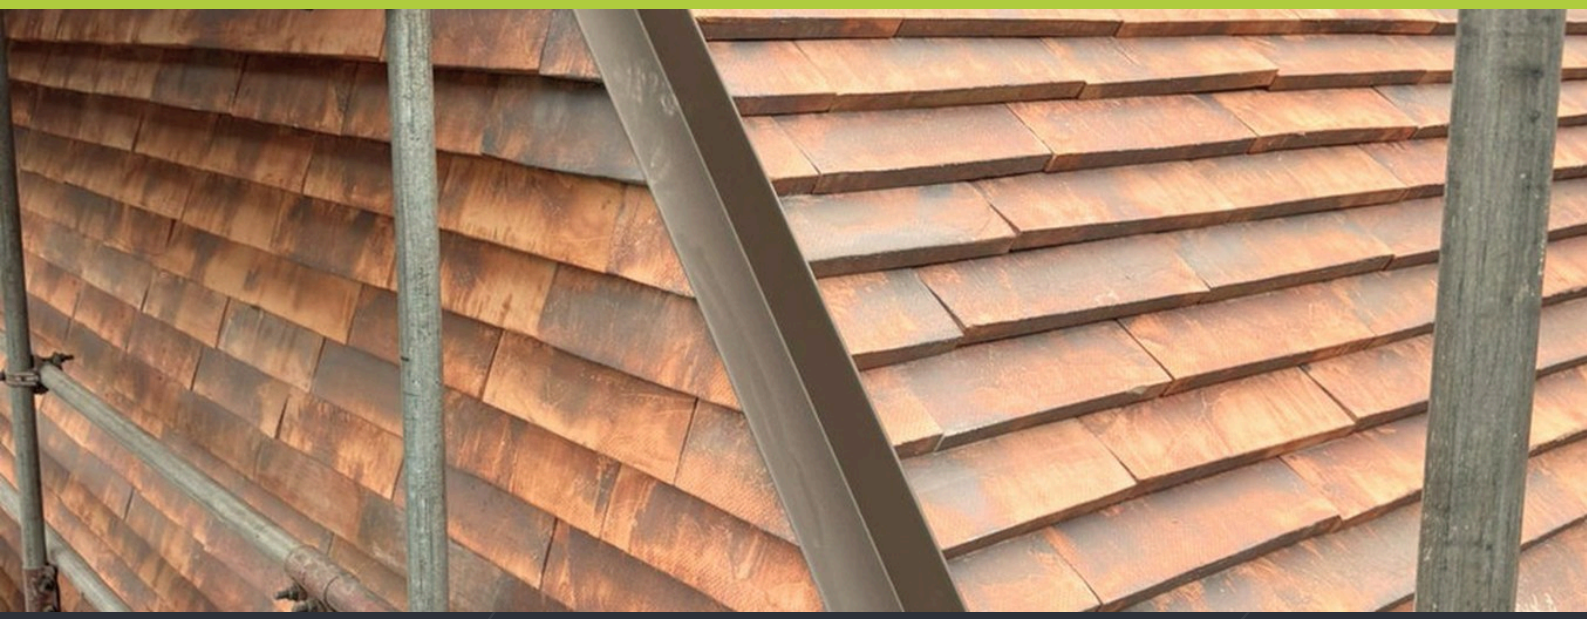

- Bristol based - Nationwide Coverage
- Carpentry & joinery
- Part of The Worx Group

PROJECT OVERVIEW

A new clay-tiled roof and walls in Clifton

Old Sneed Park is a detached residential property in Clifton, Bristol. Working for Stonewood Builders, Woodworx was appointed to strip the existing pitched roof and install new timber studwork, rafters and Douglas Fir joists, lay free-issue Petersen clay tiles to the roof and walls, fit Velux roof windows and roof balconies, and supply and install VM Zinc standing seam and trims to the perimeter of the main roof.

The scope grew through variations including second-floor joists and ply deck, ground-floor canopy and first-floor porch timbers, ceiling collars, solar panel trays, leadwork to the rear and green roof, single-ply to the porch, pergola weathering, and the framework and installation of approximately 145m² of cedar cladding supplied by Stonewood.

KEY FACTS

MAIN CONTRACTOR
Stonewood Builders

CLIENT
Private client

LOCATION
Clifton, Bristol

PROJECT TYPE
Residential Refurb

PACKAGE
New roof (incl. stripping of existing roof), vertical cladding and external feature metalwork – carpentry and roofing subcontract

PROGRAMME
Nov 2025 – Aug 2026

VALUE
£243,714 original order; £365,882 revised contract value incl. variations (Stonewood Certificate 9, Jul 2026)

c.188m²	c.139m²	c.145m²	4
CLAY TILED ROOF	CLAY TILED WALLS	CEDAR CLADDING	VELUX UNITS

CLIFTON, BRISTOL



New timber structure
Old Sneed Park, Clifton

THE CHALLENGES

Finishes that depended on other trades

01

Trade sequencing

The window surrounds had to be completed before the zinc could be fitted, and the carport steels had to be in place before the timber frame could be built.

02

Rear canopy fins

The rear canopy "fins" needed a foundation by others before installation.

03

Access

Access to the front section and MEWP availability had to be coordinated with Stonewood.

PRODUCT SOLUTIONS

Carpentry and roofing by Woodworx

Woodworx delivered the carpentry and roofing subcontract for Stonewood Builders.

SYSTEMS INSTALLED

Tiles
Free-issue Petersen 'Cover' clay tiles (528x170x27mm), approx. 188m² roof and 139m² wall, on 38x50 battens at 130mm centres

Structure
50x225 C24 rafters at 400mm centres (Goss design) with flitch-plated hips and Cullen hangers; 75x175 C24 Douglas Fir joists; 50x100 studwork with Helifix DryFix ties

Membrane & insulation
Steico Multi UDB; Knauf Rafter Roll 32 (3x75mm); 150mm Rocksilk Rainscreen Slab; 25mm Rocksilk RS45; 12mm Durelis VapourBlock

Metalwork
VM Zinc Pigmento Red 0.78mm standing seam at 430mm centres to the canopy roof, wall and fascia; 0.8mm zinc flashings and trims; 3mm PPC aluminium reveal pressings

Roof windows & cladding
Velux GDL PK19 roof balconies and Velux Integra MK08 (4 units); framework and installation of approx. 145m² cedar cladding



Timber structure
Douglas Fir and C24 timbers



New roof structure
Rafters and joists

PROJECT GALLERY

Carpentry and roofing at Old Sneed Park



Tiled roof
Under the temporary roof




Wall tiling
Window reveal




Rear elevation
Canopy and pergola



Front elevation
Clay tiles to roof and walls

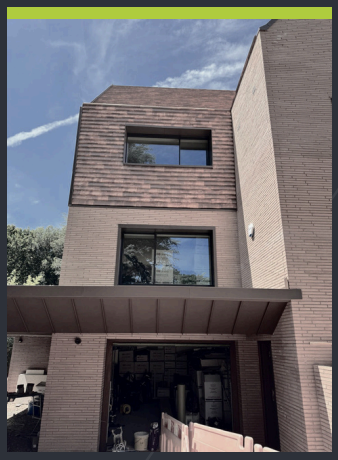

Completed elevation
Old Sneed Park, Clifton

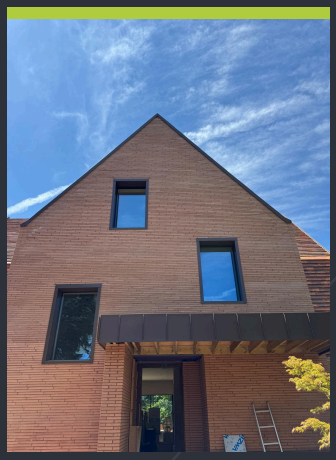

Completed gable
Petersen 'Cover' tiles

THE RESULT

Roof, walls and metalwork from Woodworx

> Woodworx stripped and rebuilt the pitched roof, laid Petersen clay tiles to approx. 188m² of roof and 139m² of wall, and fitted VM Zinc Pigmento Red standing seam, Velux roof windows and balconies, and approx. 145m² of cedar cladding.

PROJECT AT A GLANCE

01 THE CHALLENGE

Roof finishes that depended on other trades, plus coordinated access and MEWP availability.

02 OUR SOLUTION

A carpentry and roofing subcontract with clay tiles, zinc and Velux units.

03 THE RESULT

A new clay-tiled roof and walls with zinc detailing and cedar cladding.

WHY THE WORX GROUP

- **Bristol based - Nationwide Coverage**
- **Carpentry and roofing in one package**
- **Part of The Worx Group**



Rear canopy
Old Sneed Park, Clifton

WOODWORX

CARPENTRY & JOINERY

Bristol based - Nationwide Coverage

- Carpentry & joinery
- Part of The Worx Group

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group