

CASE STUDY

BEDMINSTER GREEN

Stafford Yard, Bristol

MAIN CONTRACTOR
Dandara Living

PROJECT
New Build, Residential

PACKAGE
Roofworx - Waterproofing, Insulation & Landscaped finishes



- Bristol based - Nationwide Coverage
- Full envelope contractor
- Roofs built to last. Guaranteed.

PROJECT OVERVIEW

Revitalising South Bristol on a former brownfield site

The Bedminster Green regeneration project aims to revitalise the area in South Bristol, by developing five sites into a vibrant neighbourhood with housing, amenities and public spaces.

Located on a former brownfield site, the project was delivered by Dandara Living. The development features 295 BTR apartments and resident amenities including private balconies, roof terraces with vegetable beds, a gym, lounge, retail space and courtyard gardens. The development also features 21 affordable homes.

The development has been awarded Residential Development of the Year (100+ units) at the Insider South West Residential Property Awards 2025.

KEY FACTS

MAIN CONTRACTOR
Dandara Living

LOCATION
Stafford Yard, Bedminster Green, Bristol

PROJECT TYPE
New Build, Residential

ROOFWORX PACKAGE
Waterproofing, Insulation & Landscaped finishes to roof terraces, podiums and ground level

SCOPE
Plots 4 and 4a

MANUFACTURER
Axter (Roofworx is an approved Axtershield Installer)

295	21	c.2,600m²	500-600m²
BTR APARTMENTS	AFFORDABLE HOMES	MAIN ROOF AREAS	EACH OF TWO LANDSCAPED PODIUMS



Green roof installation in progress
Roofworx package across Plots 4 and 4a

THE CHALLENGES

Green roofs, podiums & terraces in one co-ordinated design

01

A highly complex roofing environment

Green roof zones, landscaped podiums and terrace areas across two large residential buildings. The main roof areas totalled approximately 2,600m², complemented by two podiums of 500-600m² each, all requiring different performance solutions within a single, co-ordinated design.

02

Restricted, phased roof access

Phased scaffolding for cladding and brickwork restricted roof access. Roof areas were released incrementally, requiring careful sequencing, temporary night seals to protect partially completed warm roof build-ups, and close co-ordination with follow-on trades.

03

Bespoke detailing

Complex abutments to perpendicular walls, high upstands for condensation control, interfaces with landscaping, AOVs and terrace finishes demanded bespoke detailing to maintain waterproofing integrity throughout the programme.

PRODUCT SOLUTIONS


Approved Axtershield Installer

As an approved Axtershield Installer, Roofworx (TWG) was appointed to deliver the roofing package across Plots 4 and 4a - combining warm roof systems, hot melt waterproofing and green roofs, including the roof terrace, podiums and ground level landscaping packages.

Roofworx worked closely with Axter, who had specified a combination of proven systems tailored to each area:

SYSTEMS INSTALLED

- **Starcoat® PMMA detailing**
  At complicated junctions, penetrations and interfaces to ensure continuity and durability across the scheme
- **CityFlor® warm roof system**
  Installed in green roof areas
- **Hyranger® warm roof system**
- **Wilotekt®-Plus hot melt waterproofing**
  Across podiums and terraces

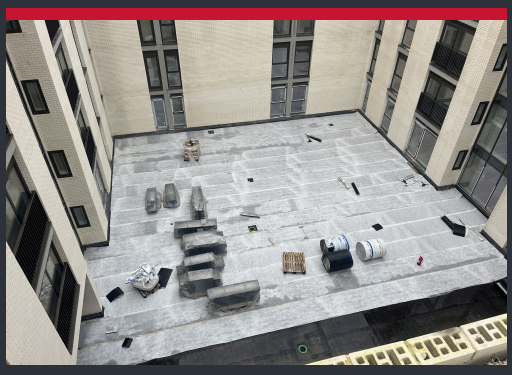

Main roof
Bedminster Green, Stafford Yard



Roof areas from above
Stafford Yard, Bristol

PROJECT GALLERY


Roof terraces, podiums and ground level landscaping




Courtyard from above
Bedminster Green, Stafford Yard




Roof terrace
Planters and paving

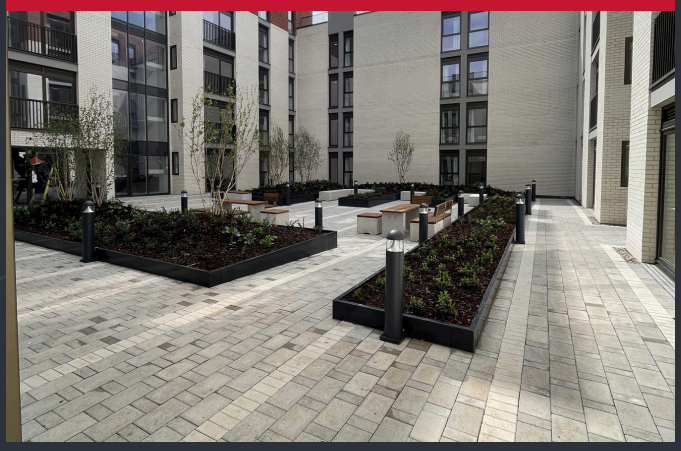

Podium
Landscaped podium

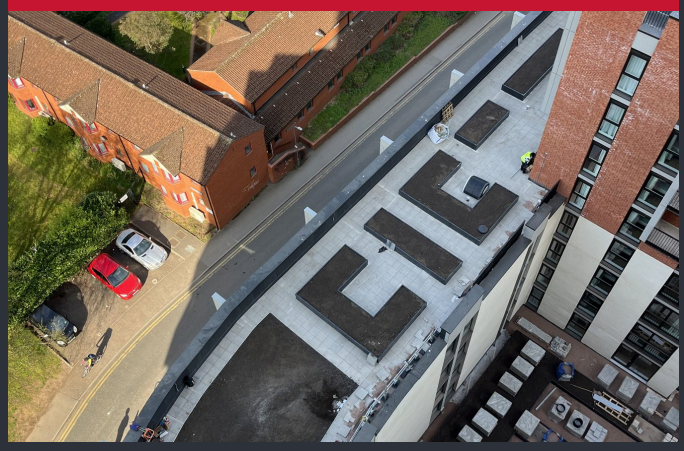

Aerial view
Stafford Yard, Bristol

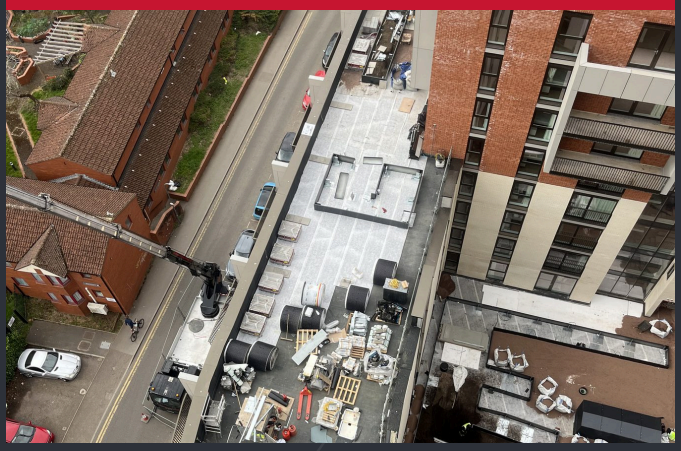

Aerial view
Stafford Yard, Bristol



Aerial view
Bedminster Green, Bristol

THE RESULT

Delivered on time, to an exceptionally high standard

> Despite restricted access, phased construction and complex detailing, Roofworx (TWG) delivered the project to an exceptionally high standard, on time.
>
> This project demonstrates Roofworx (TWG)'s ability and expertise in delivering co-ordinated, large scale residential roofing schemes within demanding construction environments.

PROJECT AT A GLANCE

01 THE CHALLENGE

Green roofs, podiums and terraces across two large residential buildings, with restricted, phased roof access and complex detailing.

02 OUR SOLUTION

Axter warm roof, hot melt and green roof systems with Starcoat® PMMA detailing, installed by an approved Axtershield Installer.

03 THE RESULT


Delivered on time and to an exceptionally high standard, despite restricted access and phased construction.

AWARD-WINNING DEVELOPMENT

Residential Development of the Year (100+ units) - Insider South West Residential Property Awards 2025

WHY ROOFWORX

- **Bristol based - Nationwide Coverage**
- **Full envelope contractor**
- **Roofs built to last. Guaranteed.**

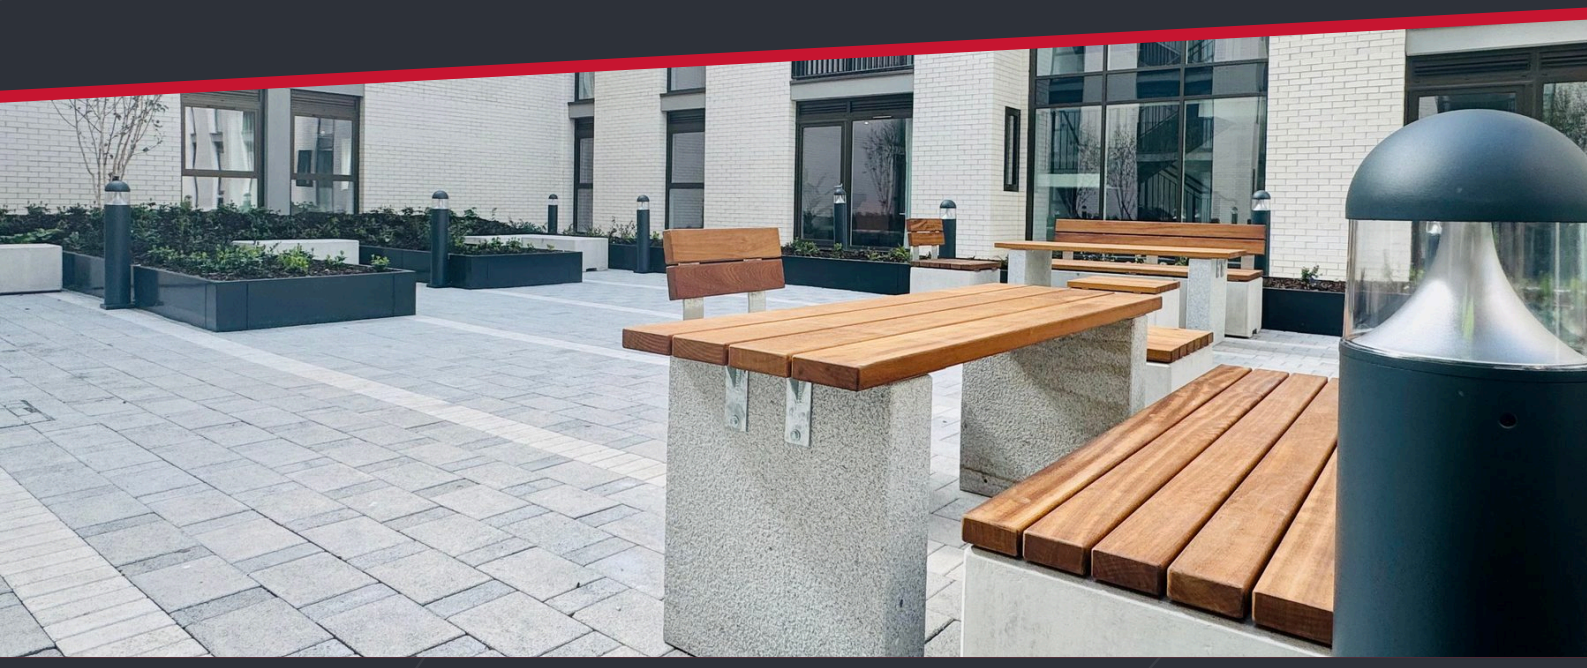

Ground level landscaping

Courtyard gardens - Bedminster Green, Stafford Yard

ROOFWORX
ROOFING & CLADDING

Bristol based - Nationwide Coverage

- Full envelope contractor
- Roofs built to last. Guaranteed.

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group