

CASE STUDY

HAWTHORNE HOUSE

Station Street, Stratford

MAIN CONTRACTOR
RG Group

PROJECT
Student Accommodation & Sixth-Form College

PACKAGE
Joinery second fix – doorsets, ironmongery, skirting, architrave & window boards

C.2,294 DOORSETS INSTALLED



- Bristol based - Nationwide Coverage
- Carpentry & joinery
- Part of The Worx Group

PROJECT OVERVIEW

Second-fix joinery from level B2 to 36

Hawthorne House on Station Street, Stratford, combines purpose-built student accommodation with a sixth-form college across levels B2 to 36. Woodworx was appointed by RG Group in May 2025 to deliver the second-fix joinery package.

The package covered unloading and distributing materials, installing approximately 1,868 student accommodation and 426 college doorsets with ironmongery, and fitting skirting, architrave and window boards.

Fire doorsets were installed and recorded through our sister company Fire-Worx under the BM TRADA Q-Mark Fire Door Installation scheme, with a Record of Installation Activities, firestopping details and photographs logged for each door and included in the O&M.

KEY FACTS

MAIN CONTRACTOR
RG Group

CLIENT
Unite Students

LOCATION
Station Street, Stratford

PROJECT TYPE
Student Accommodation & Sixth-Form College

PACKAGE
Joinery second fix – doorsets & ironmongery, skirting, architrave and window boards, plus variations

PROGRAMME
May 2025 – Apr 2026; post-completion works to Jul 2026

VALUE
£826,218 original order value

c.1,868	c.426	683	B2–36
STUDENT ACCOMMODATION DOORSETS	COLLEGE DOORSETS	PODS LEVELLED	LEVELS



Corridor doorsets
Second fix in progress

THE CHALLENGES

Scale, sequencing and level thresholds

01
Scale & logistics

With doorsets on every level from B2 to 36, materials had to be unloaded and distributed across the floors alongside other trades.

02
Thresholds & pods

Floor finishes and bathroom pods did not always line up with door thresholds, so a threshold survey was carried out and 683 pods were levelled out before doors could be finished.

03
Programme

The programme was revised up to April 2026, with temporary doors provided to WCs and risers, and post-completion works continued to July 2026.

PRODUCT SOLUTIONS

Certified fire doorsets and MDF joinery

Fire doorsets were installed and recorded under the BM TRADA Q-Mark Fire Door Installation scheme via Fire-Worx (certificate #4273), with a Record of Installation Activities and photographs for each door.


SYSTEMS INSTALLED

Doorsets
Fire doorsets and ironmongery supplied by others (IDSL) and installed by Woodworx; e.g. FD30(s) with TS3 intumescent sealant and TS Guard 10mm firestopping


Certification
BM TRADA Q-Mark Fire Door Installation scheme (Fire-Worx certificate #4273)

Skirting & architrave
Supplied by Timber & Allied: 270x39mm and 69x18mm pencil-round MDF to the student accommodation; 100x18mm MDF to the college

Variations
Pod levelling, temporary WC and riser doors, accessible shower boxings, aluminium trims, window cill change, suspended oak ceiling, maglock cabling, lining extensions and threshold works

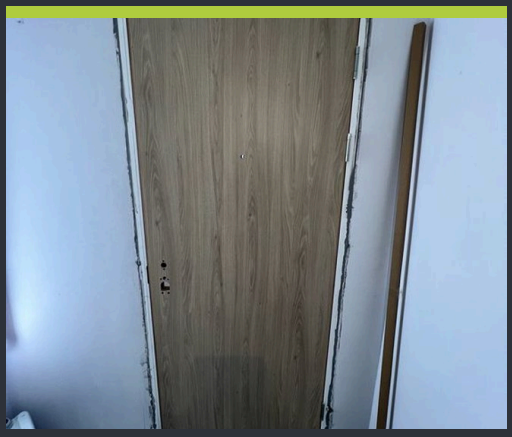


Doorset
Frame and leaf installed

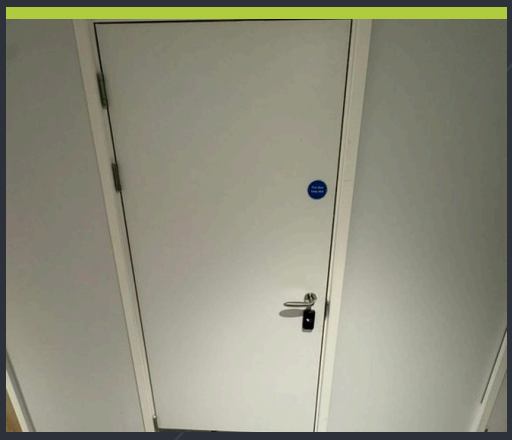

Completed doorset
Skirting and architrave


PROJECT GALLERY

Second-fix joinery at Hawthorne House

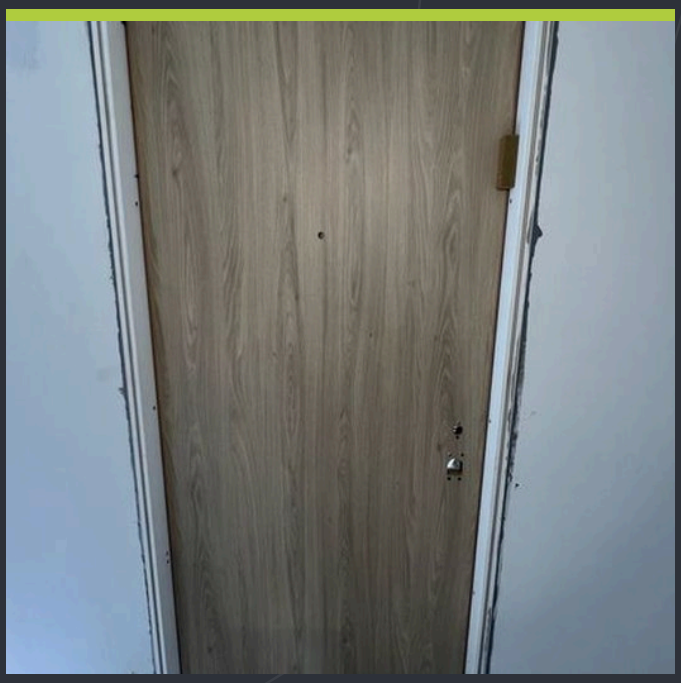

Fire doorset

Frame and ironmongery

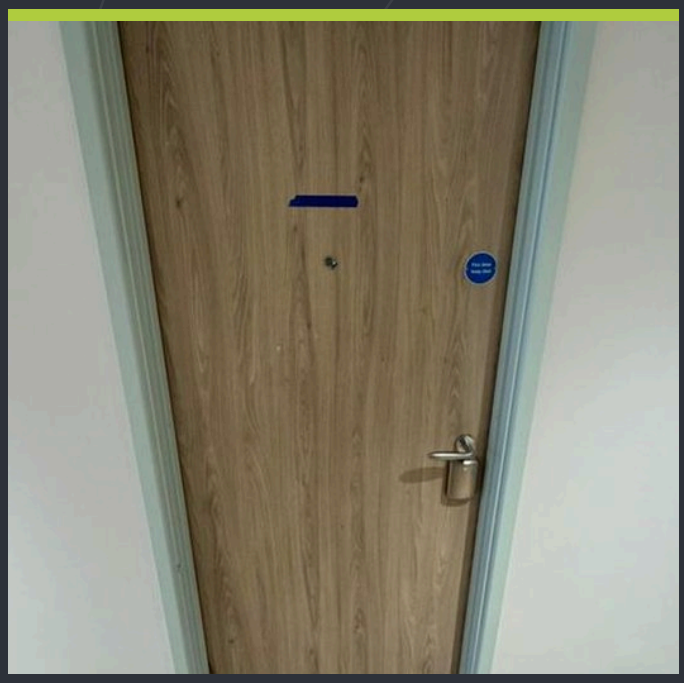

Completed doorset

Signage and ironmongery fitted



Firestopping detail

Sealant to the doorset frame

THE RESULT

Certified doorsets across 38 levels

Woodworx installed approximately 1,868 student accommodation and 426 college doorsets with ironmongery, plus skirting, architrave and window boards, for RG Group and Unite Students.

Every fire doorset was recorded under the BM TRADA Q-Mark scheme via Fire-Worx, with installation records, firestopping details and photographs included in the O&M.

PROJECT AT A GLANCE

01 THE CHALLENGE

Doorsets on every level from B2 to 36, and pods and floor finishes that did not line up with thresholds.

02 OUR SOLUTION

A threshold survey, 683 pods levelled and certified installation through Fire-Worx.

03 THE RESULT


c.2,294 doorsets installed and recorded for the O&M.

BM TRADA Q-MARK

Fire doorsets installed and recorded under the Q-Mark Fire Door Installation scheme via Fire-Worx

WHY THE WORX GROUP

- **Bristol based - Nationwide Coverage**
- **Certified fire door installation via Fire-Worx**
- **Joinery, roofing and fire doors from one group**

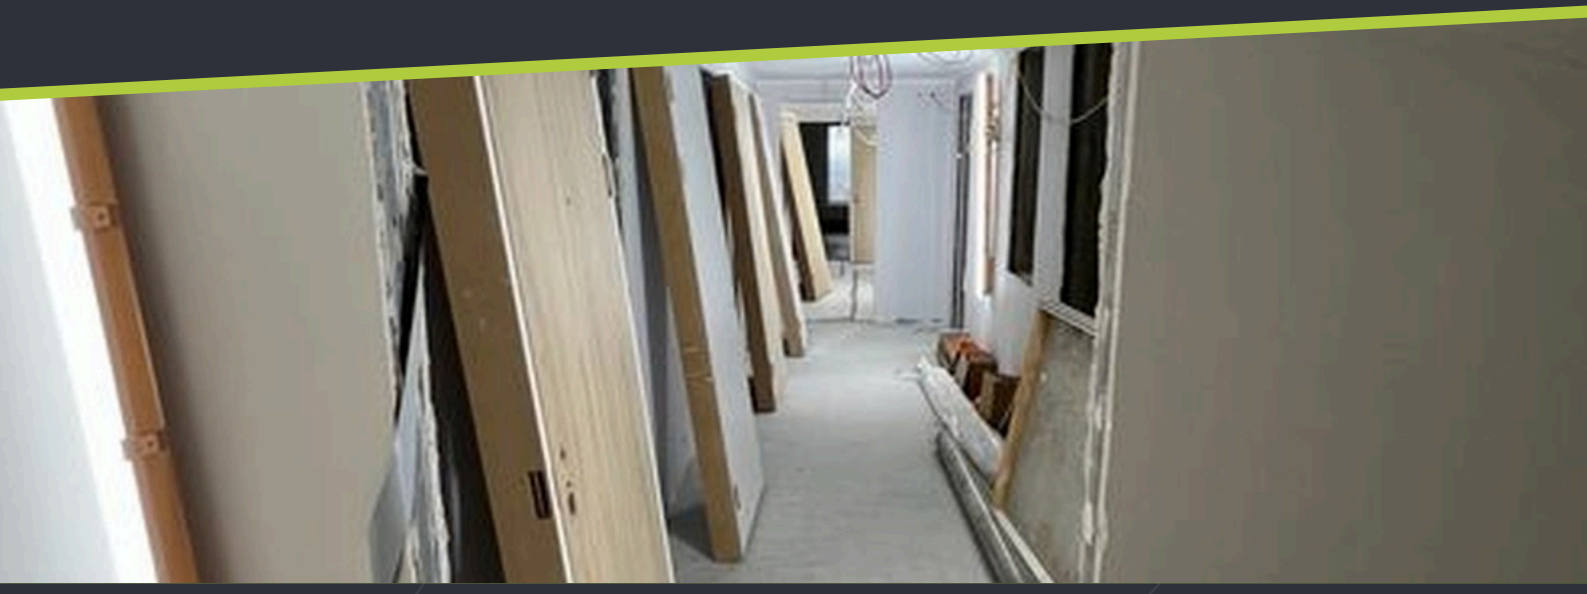

Corridor
Hawthorne House, Stratford

WOODWORX

CARPENTRY & JOINERY

Bristol based - Nationwide Coverage

- Carpentry & joinery
- Part of The Worx Group

Got a project? Let's Talk

enquiries@theworxgroup.co.uk

01173 018152

twg-the-worx-group

www.theworxgroup.uk

Part of The Worx Group